

ES 218 - 230




ELECTRIC TURBOVENTILATOR

" Powerful Electric Blowing Action "

CONFORMS TO CE STANDARDS

**GUARANTEES : TURBINE : 5 YEARS
MOTOR : 1 YEAR**

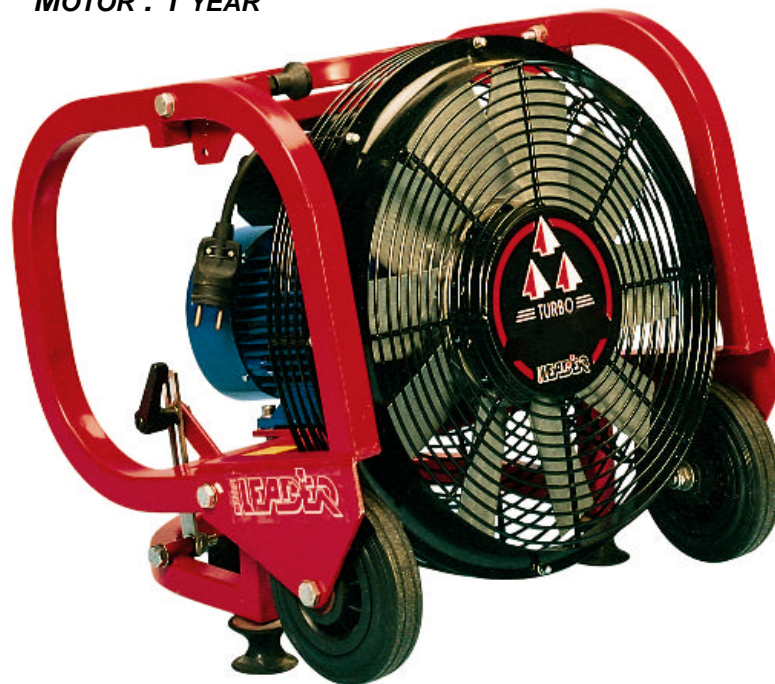

- Ventilation by positive pressure (blowing) action
- Compact, can easily be stowed in the boot of a vehicle
- Portable, easy to handle, stable
- Turbine made of resin, aluminium axle
- Very easy to set up
- Does not pollute
- Low noise level compared with internal combustion engines
- Shroud protected by red epoxy coating RAL 3000

Model	Reference	Initial airstream speed	Nominal airflow	Entrained additional air	Total ventilation capacity
ES 218	I63.10.000	90 km/h	6 000 m ³ /h	+ 12 000 m ³ /h	= 18 000 m ³ /h
ES 230	I63.10.001	140 km/h	11 000 m ³ /h	+ 19 000 m ³ /h	= 30 000 m ³ /h


Option : Progressive starter (non-A.D.F.) : Ref. : I63.20.007



Model	Engine Power rating : 2 200 W		Power supply	Dimensions Length x Height x Depth (cm)	Weight (kg)
	Consumption	Starter			
ES 218	7.6 A *	41 A – 5 sec.	220 v single / 50 HZ	52 x 49.5 x 42	35,5
ES 230	11.5 A*	41.8 A - 5 sec	220 v single / 50 HZ	52 x 49.5 x 42	35,5

* Consumption at operating speed.

Entrainment effect specific to Turboventilators

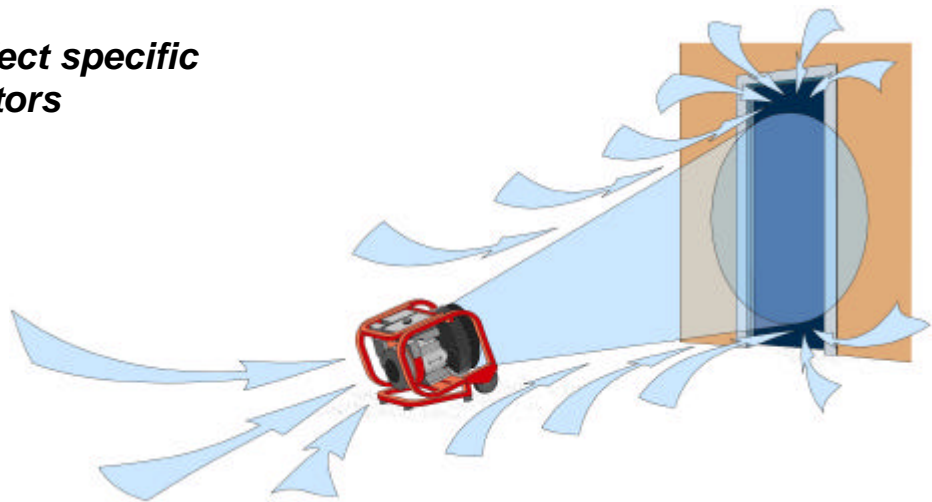

Model ES 230

